

# SPIN 30

Continuous mixer for premixed materials

## Standard Equipment

- ✓ Single-phase version: 230V/50 Hz electric motor – 2.2 kW
- ✓ Three-phase version: 400V/50Hz electric motor – 3 kW
- ✓ Hopper with bag-breaker grid
- ✓ Removable mixing chamber
- ✓ Electric control panel
- ✓ Water system
- ✓ Self-priming water pump
- ✓ Flow meter
- ✓ 20 m water hose Ø 3/4" with quick couplings
- ✓ 20 m electric supply cable
- ✓ Safety devices according to the latest CE standards

## APPLICATIONS

- For mixing quickly and homogeneously premixed plaster, masonry mortar, binding mortar for tiles, self-levelling materials and traditional premixed screeds in bags.
- In combination with the mortar pump, the Spin 30 can form a single mixing and pumping unit.
- It can be supplied automatically if it is joined on a transfer system for materials from silos.



✓ Electric panel with user friendly controls


✓ Gear motor with direct drive, high motor torque

✓ Safety device on mixing screw opening

✓ Complete with hooks and wheels for easy handling

✓ Self-priming water pump with stainless steel casing and brass impeller

✓ Innovative mixing unit for easy maintenance

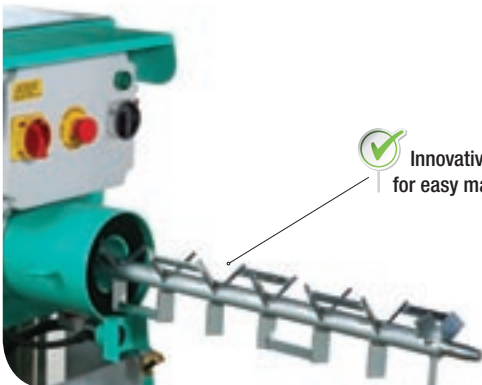

## ACCESSORIES



Blower hood

Supply	-	230V/50Hz	400V/50Hz
Motor power	kW	2,2	3
Mixer speed	rpm	280	280
Mixing performance	l/min	30	30
Hopper capacity	l	110	110
Loading height	mm	1100	1100
Dimensions width/length/h	mm	720/1860/1140	720/1860/1140
Weight	kg	130	130
Sound pressure level	dB (A)	< 65	< 65