


## Standard Equipment

- ✓ Single-phase 230V/50Hz motor – Gearmotor in oil bath and high performance Poly-V transmission belt
- ✓ Electric safety limit switch
- ✓ Thermal-magnetic switch with IP 55 no-volt coil and IP 67 plug
- ✓ Paddle rotation reversing gear
- ✓ Grid with bag-splitting blade
- ✓ Extendable handles
- ✓ Lifting hooks
- ✓ Additional wheels

## Applications

Powerful and versatile, it batches the most difficult products, both traditional and pre-mixed materials thanks to its high power, increased speed and the possibility to reverse the direction of rotation of the paddles.

<b>115V/60Hz SPH</b>	<b>220V/60Hz SPH</b>
<b>MOTOR AVAILABLE</b>	
✓ <b>Mix 120 Plus</b>	




## Fast and homogeneous batching

Thanks to the forced-duty planetary mixing system the batching time is minimal: batching 80 litres of lean mortar takes about 40 seconds.

## Outlet

(Mix 120 Plus seen from below)  
Optimized outlet for an easy discharge of the material.

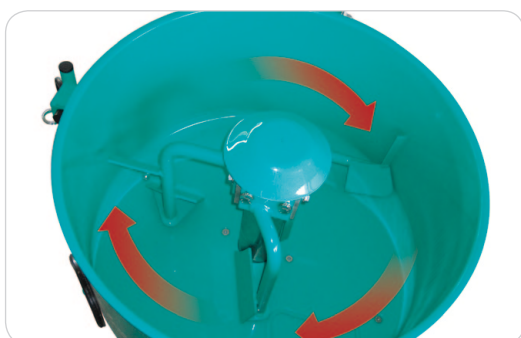

MIX 120 Plus		
Drum capacity	l	120
Mixing performance	l	90
Drum diameter	mm	745
Max grain size	mm	8
Paddle speed	rpm	38
Electric motor power rate 230V/50Hz	kW	1.4
Running current	A	9
SPL in operator's position	dB(A)	70
Machine weight (packing)	Kg	130 (139)
Dimensions w/l/h (packing)	mm	745/842/1277 (770/880/955)