

SPIN 15

Continuous mixer for premixed materials and fine mortar

Standard Equipment

- ✓ Single-phase motor 230V/50Hz – 1.4 kW
- ✓ Hopper with bag-breaker galvanized grid
- ✓ Removable mixing chamber
- ✓ Mixing shaft with wear-resistant steel paddles
- ✓ Fine mortar mixing kit (standard for Spin 14A Cappotto version)
- ✓ Electric control panel
- ✓ Water system
- ✓ Water pump (standard for Spin 15 A version)
- ✓ 10-m water hose with quick couplings
- ✓ Packing: in cardboard



NO LIMIT WITH PRE-MIXED MATERIALS IN BAGS

- ✓ Plasters
- ✓ Masonry mortars
- ✓ Conventional screeds
- ✓ Self-levelling screeds

APPLICATIONS

Spin 15 / Spin 15A


for mixing quickly:

- Premixed plasters
- Masonry mortars
- Self-levelling materials
- Premixed materials in bags for conventional floor-screeds
- Fine mortar for laying thermal insulation systems and tiles (with dedicated optional kit)

In combination with a plaster sprayer or mortar pump, it can form a single mixing and pumping unit.

Spin 15A Cappotto

For mixing fine mortar for laying thermal insulation systems and tiles, thanks to a dedicated mixing kit, which is supplied as standard on Spin 15A Cappotto.

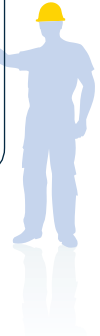

✓ Ergonomic controls

✓ Maximum safety for the operator: the automatic mixing lock is enabled when the mixing chamber is removed, in observance of EC regulations

✓ Patented IMER gear motor with direct transmission for high performance

✓ Adjustable height (950, 1095 and 1165 mm)



✓ High motor torque for optimum start-up with full load



✓ In combination with a plaster sprayer or mortar pump, it can form a single mixing and pumping unit

✓ Easy to disassemble, clean and maintain




EASY thermal insulation system

Spin 15A can be supplied with a dedicated mixing kit and combined with a mortar pump i.e. **Small 50** for mixing and pumping non-stop fine mortar and smoothing products.



✓ Easy to transport thanks to low bulk and weight, and to the perfect balance of the machine

ACCESSORIES

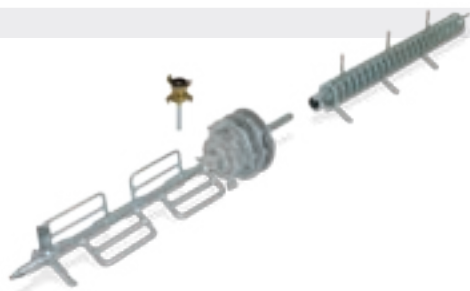

Fine mortar mixing kit
(standard for Spin 15A Cappotto version)



Litre counter

		SPIN 15	SPIN 15A	SPIN 15A Cappotto
Supply	-	230V/50Hz	230V/50Hz	230V/50Hz
Motor power rate	kW	1.4	1.4	1.4
Mixer/paddle speed	rpm	280	280	280
Mixing performance	l/min	15-18	15-18	7
Hopper/tank capacity	l	60	60	60
Standard water pump	-	no	yes	yes
Loading height	mm	1165/1095/950	1165/1095/950	1165/1095/950
Dimensions width/length/h	mm	720/1380/1165-950 (max-min)	720/1380/1165-950 (max-min)	720/1380/1165-950 (max-min)
Box dimensions width/length/h	mm	800/590/830	800/590/830	800/590/830
Weight (with packing)	kg	78 (82)	78 (82)	78 (82)
Sound pressure level	dB(A)	<65	<65	<65